



4eBin™



4eBin™

High visibility and
easy maintenance

Mounting instructions

Installation


On crossbar with swing down arms:

- 1 Place the swing down arm on the crossbar in the desired position.
- 2 Turn the screw 90° in a safe mode, just to avoid the holder falling.
- 3 Hang the gravity bins onto the metal holder and fix the screws that lock completely the holder onto the crossbar.


- 4 4eBin™ has two positions: dispensing and refilling. When refilling the bin the 4eBin™ can be moved 90° down enabling easy refill without removing the bin from the shelf.



- ! Installing swing down arms is the preferred option for rows higher than 1,60 m.
- ! 4eBin™ and 3eBin™ are compatible with both SDA4e and SDA.

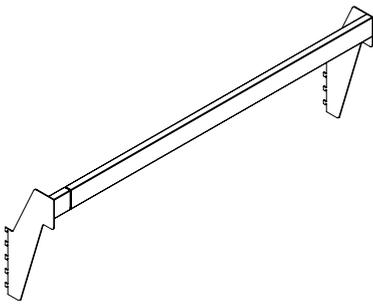

X-BAR




SDA4e



Installation

On crossbar with holder:

- 1 Place the metal holder on the crossbar in the desired position.
- 2 Hang the gravity bins onto the metal holder.

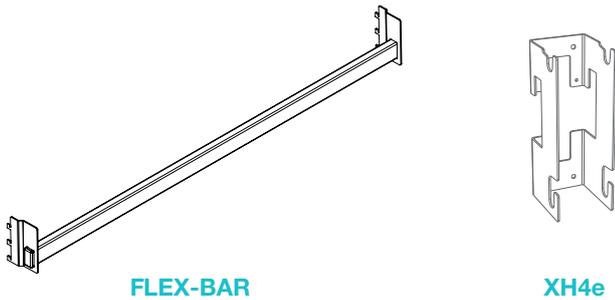

- ! 4eBin™ and 3eBin™ are fully compatible with both XH4e and XH.
- ! 4eBin™ and 3eBin™ are both compatible with GB FOOT.




On shelf with foot:

- 1 Fix the BBR profile onto the shelf at the right depth (put 1 foot at each shelf end as help).
- 2 Mount the bin to GB Foot.
- 3 Angle bin slightly when inserting it into the profile. Push it into the desired position and the bin and the foot will be locked in place.



1 BBR



2 GB FOOT-



3

Remerchandising

First in, first out

- 1 Remerchandising is done through the top lid. The lid can be fully removed or just opened.
- 2 Remerchandising for gravity bins is greatly facilitated by the use of swing down arms.
- 3 Another option for remerchandising is to remove the bin from the racking and use the refilling trolley.



2



3



1


Flow control

Determine the flow of merchandise

- The opening of the shutter can be set in three (3) different positions, minimum, medium and maximum flow
- Default setting is the minimum flow
- Adjust the flow by moving the metal pin to the desired position



Metal pin

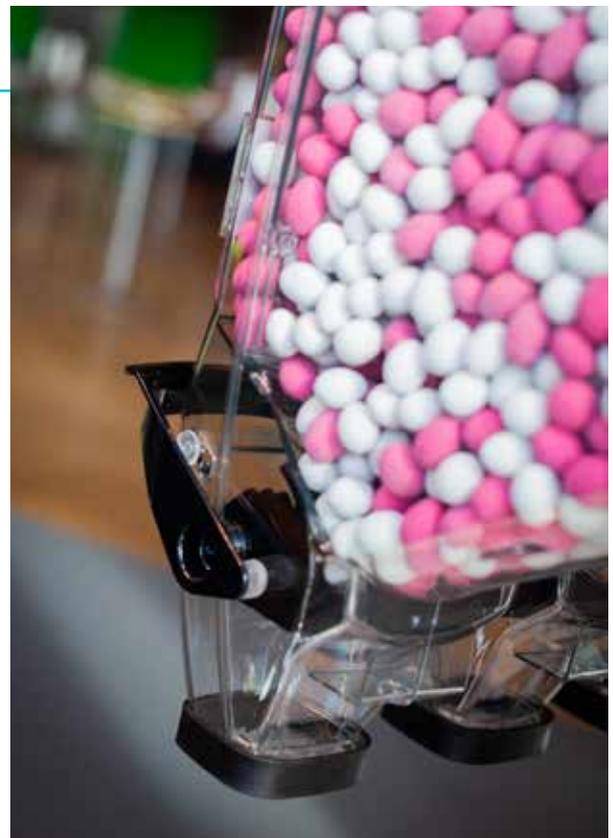

Price communication

Holder for ESL carrier profile

- 1 To mount an ESL label, you need a holder with a carrier profile.
- 2 Insert the ESL label into the carrier profile.
- 3 Fix the ESL carrier profile to the GB4e-ESLH holder.
- 4 Click-on the GB4e-ESLH holder to the bin front.



4



1



2



3a



3b



Holder for paper label

One label holder is included with the bin. Additional label holders can be mounted.




Label holder exchangeable

Label easily removed from the pocket.



Category frames, printable signs and decorative frames

Easily clicked on to fixing points on the front sides.

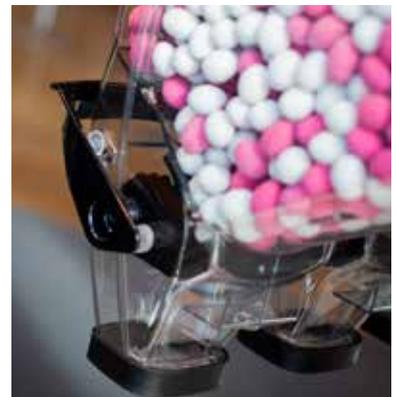

© HL Display - CORP1218AB58 - Edition 1/2019

Packaging-free merchandising creates differentiation



Scan to read more and
watch product video!

HL DISPLAY AB
Cylindervägen 18 Box 1118
131 26 Nacka Strand, Sweden

Tel +46 8 683 73 00

www.hl-display.com
info@hl-display.com

